


Mounting Cliphanger® Bolt™


To accommodate phone features and user preferences, Cliphanger® Bolt™ can be mounted so that it extends toward either the top or bottom of the phone.

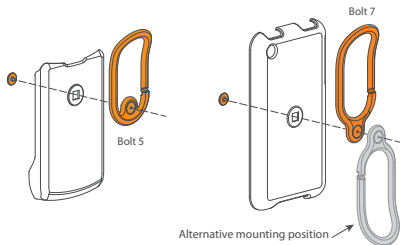

1. Before placing shield on phone, place Cliphanger® Bolt™ in desired position with square lug placed into the square hole of the Cliphanger® Shield™ or other protector case.
2. Check for any interference with camera viewer and change orientation if necessary*.
3. Secure in place with screw. Tighten screw as tight as possible with included screwdriver. Cliphanger® Bolt™ is designed to “pull” into the hole while tightening. This provides a snug fit and prevents the screw from backing out accidentally.

Using Cliphanger® Bolt™

1. Flex open free end of Cliphanger® Bolt™ with index finger or thumb.

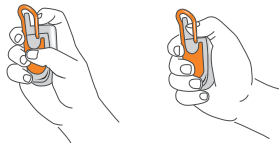

2. Slip free end through pant loop or purse strap and let hang (front pant loop recommended). Pull up and away from pant loop or purse strap to remove.



*Note about cameras: If Cliphanger® Bolt™ blocks the camera, mount in opposite direction. For “flip” style phones, simply change the angle of the camera lens by holding back the “flip” portion of the phone from fully opening.